



For Continuation See Drawing No. 4003

For Continuation See Drawing No. 4001

MOORES HOTEL


Proposed Parapet Wall and Railing
Proposed Ground Level (Dry Side)

Existing Timber toe piles

Existing Timber Fenders to be maintained

Morrisons Quay Chainage
Proposed Ground Levels Dry Side
Proposed Top of Wall Levels

210.00	200.00	190.00	180.00	170.00	160.00	150.00
2.90	2.90	2.90	2.90	2.90	2.90	2.90
3.50	3.50	3.50	3.50	3.50	3.50	3.50

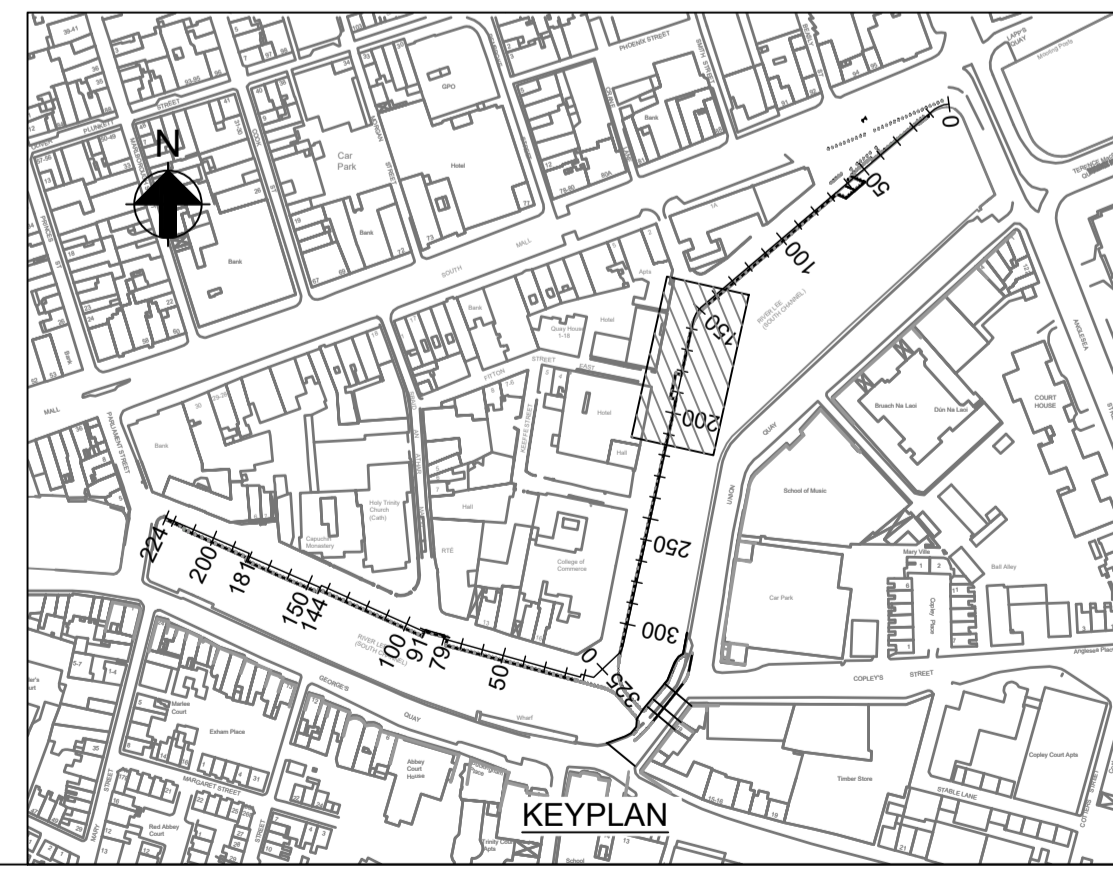

Ordnance Survey Ireland Licence No. EN 0002818
Ordnance Survey Ireland/ Government of Ireland
OS Sheet No. 6382-15

- Notes:**
- All levels are Relative to Ordnance Datum Malin Head.
 - Levels indicated on building elevations refer to finished floor levels.
 - All existing outfalls to be fitted with non-return valves.
 - Face of Existing Quay Wall to be cleaned and repointed.
 - The existing timber fender piles are generally in very poor condition, with many in states of partial collapse. The condition of the fenders will be further assessed during the detailed design stage, and any elements which are deemed to pose an unacceptable risk to construction stage health and safety will be removed by the contractor.

P01	12/02/18	SOF	AL	KL
Planning Issue				
Rev	Date	By	Chkd	Appd

ARUP
One Albert Quay
Cork, Ireland
Tel +353 (0)21 427 7670 Fax +353 (0)21 427 2345
www.arup.com

the paulhogarth company

Client
Cork City Council
City Hall, Anglesea Street,
Cork.

Project Title
Morrison's Island Public Realm
and Flood Defence Project

Scale at A1 1:100

Role
Civil Infrastructure

Suitability
Part 8 Planning

Arup Job No
230436-00

Rev
P01

Name
MOR-4002

Drawing Title
Proposed Elevation
Sheet 3 of 9