


40.00	30.00	20.00	10.00	Father Matthew Quay Chainage	320.00	310.00	300.00	290.00	280.00	Morrisons Quay Chainage
3.50	3.50	3.50	3.50	Proposed Ground Levels	2.90	2.90	2.90	2.90	2.90	Proposed Ground Levels Dry Side
3.50	3.50	3.50	3.50	Proposed Top of Wall Levels			3.50	3.50	3.50	Proposed Top of Wall Levels

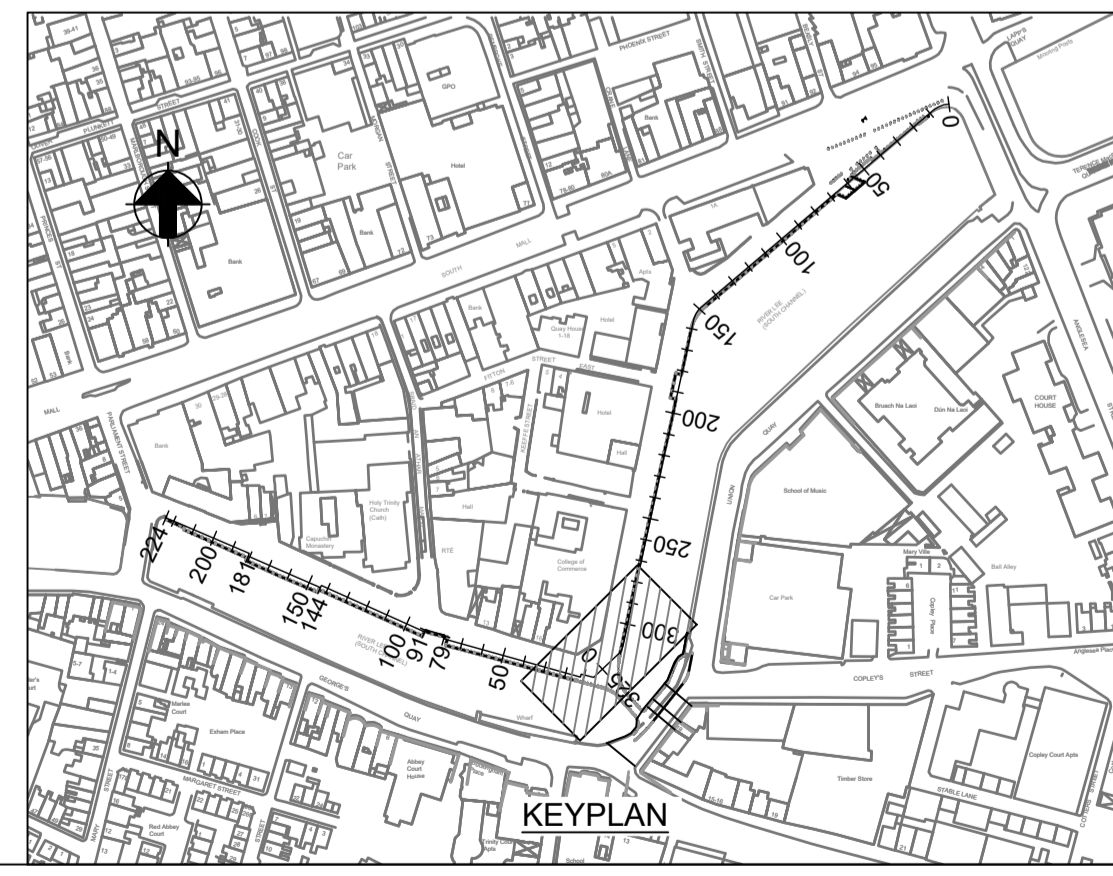

Ordnance Survey Ireland Licence No. EN 0002818
 Ordnance Survey Ireland/ Government of Ireland
 OS Sheet No. 6382-15

- Notes:**
- All levels are Relative to Ordnance Datum Malin Head.
 - Levels indicated on building elevations refer to finished floor levels.
 - All existing outfalls to be fitted with non-return valves.
 - Face of Existing Quay Wall to be cleaned and repointed.
 - The existing timber fender piles are generally in very poor condition, with many in states of partial collapse. The condition of the fenders will be further assessed during the detailed design stage, and any elements which are deemed to pose an unacceptable risk to construction stage health and safety will be removed by the contractor.

P01	12/02/18	SOF	AL	KL
Planning Issue				
Rev	Date	By	Chkd	Appd

ARUP
 One Albert Quay
 Cork, Ireland
 Tel +353 (0)21 427 7670 Fax +353 (0)21 427 2345
 www.arup.com

the paulhogarth company

Client
 Cork City Council
 City Hall, Anglesea Street,
 Cork.

Project Title
 Morrison's Island Public Realm
 and Flood Defence Project

Drawing Title
 Proposed Elevation
 Sheet 5 of 9

Scale at A1	1:100
Role	Civil Infrastructure
Suitability	Part 8 Planning
Arup Job No	230436-00
Name	MOR-4004
Rev	P01